

On the characterization of particulate matter emissions from solid biomass combustion

Cornette, Jordi; Bram, Svend

Publication date:
2020

Document Version:
Final published version

[Link to publication](#)

Citation for published version (APA):
Cornette, J., & Bram, S. (2020). *On the characterization of particulate matter emissions from solid biomass combustion*. Poster session presented at ETP 9th Annual Conference 2020, .

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

ON THE CHARACTERIZATION OF PARTICULATE MATTER EMISSIONS FROM SOLID BIOMASS COMBUSTION

Jordi CORNETTE and Svend BRAM

Thermo and Fluid Dynamics (FLOW), Vrije Universiteit Brussel (VUB), Belgium


Jordi.Cornette@vub.be

Poster for ETP 9th Annual Conference, 2-3 November 2020







Biomass combustion plays an important role in the transition to a renewable energy landscape, especially for industrial and domestic heat generation. The Particulate Matter (PM) emissions from solid biomass combustion are a major drawback for the further development of this technology.

PM emissions are often expressed in mass per volume of flue gas (g/m^3). However, this gives no information about the size and the number of particles.

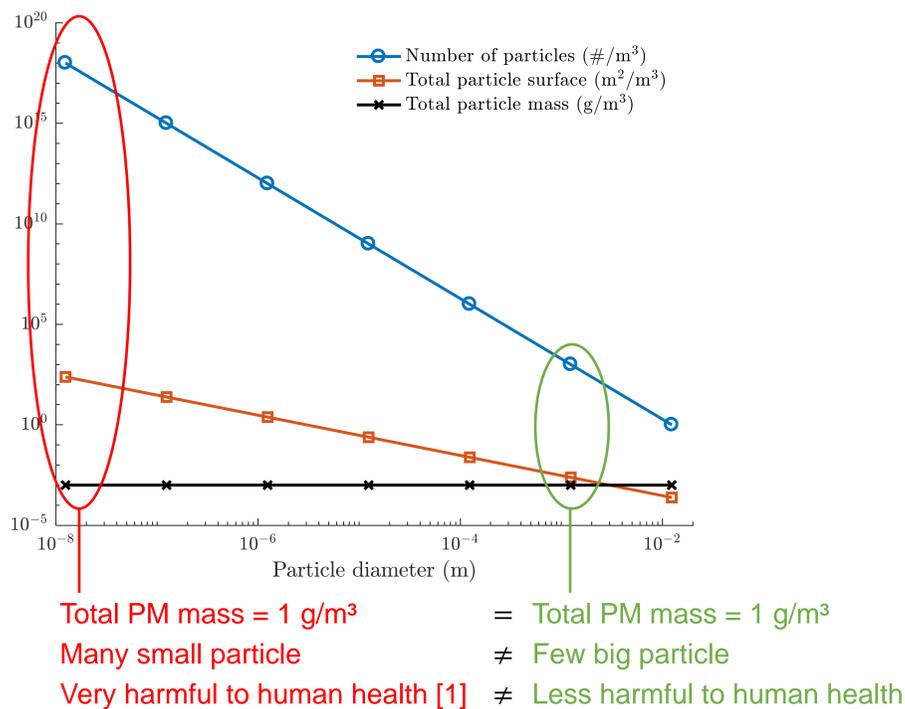

PM emissions should be characterized using the particle number and particle size (i.e. particle number size distribution). The particle number size distribution is measured with an Electrical Low Pressure Impactor (ELPI+, Dekati) with a two-stage dilution system. See reference [2] for our detailed description of the used measurement setup.

In the period from 2016 to 2020, we carried out several PM emissions measurements from different pellet and wood chip boilers, both in small- and medium-scale installations. Most boilers were equipped with flue gas cleaning technology, such as **baghouse filters**, **electrostatic precipitators (ESP)** or **flue gas condensers (FGC)**. When no flue gas cleaning is applied, the emission from wood chips are typically higher compared with wood pellets. With flue gas cleaning, PM emissions are considerably lower, especially with the medium-scale boilers due the high capture efficiency of the baghouse filters.

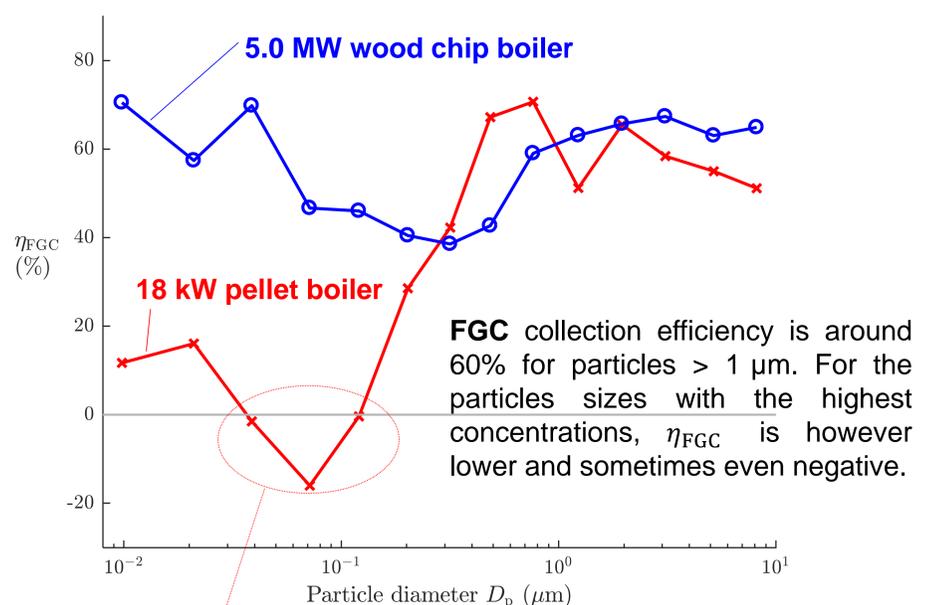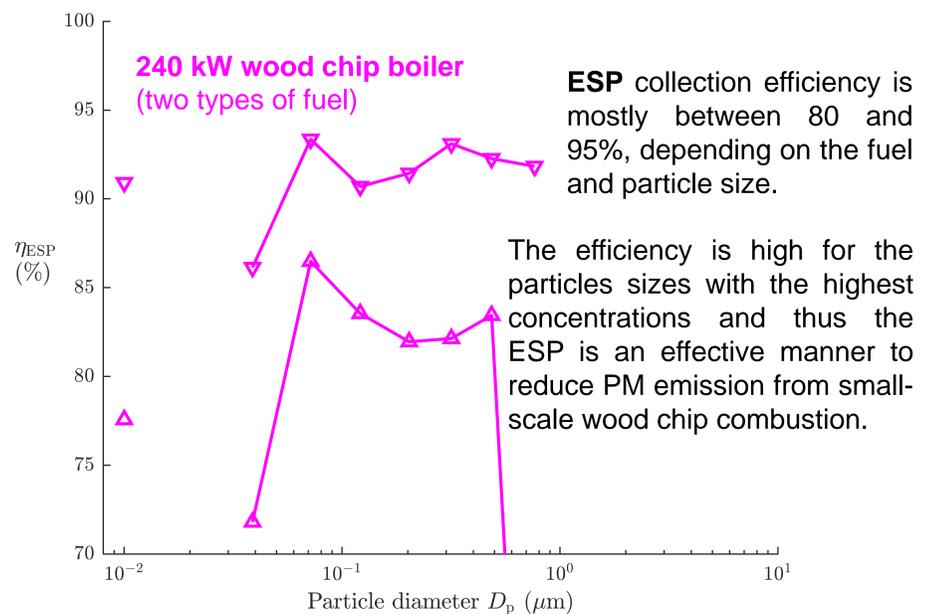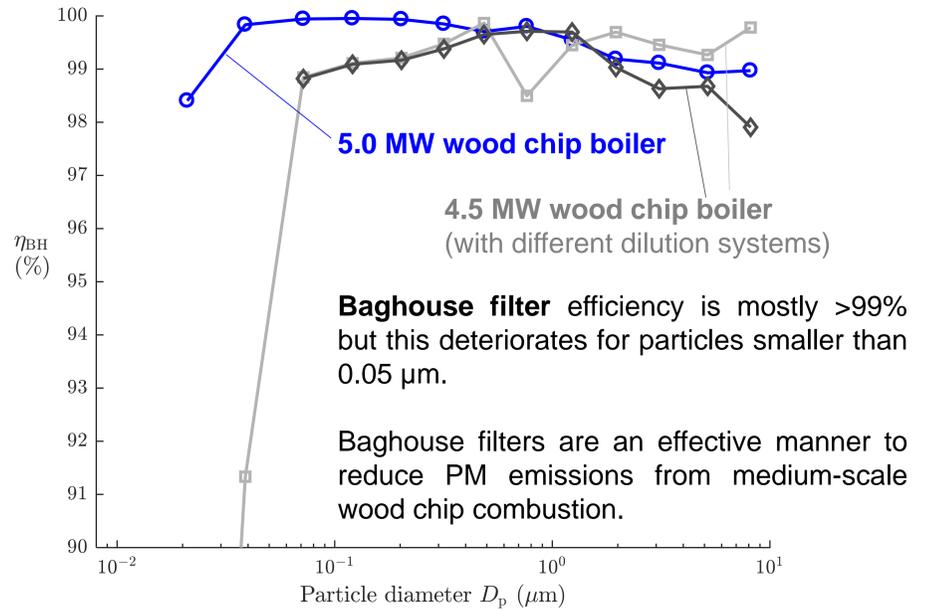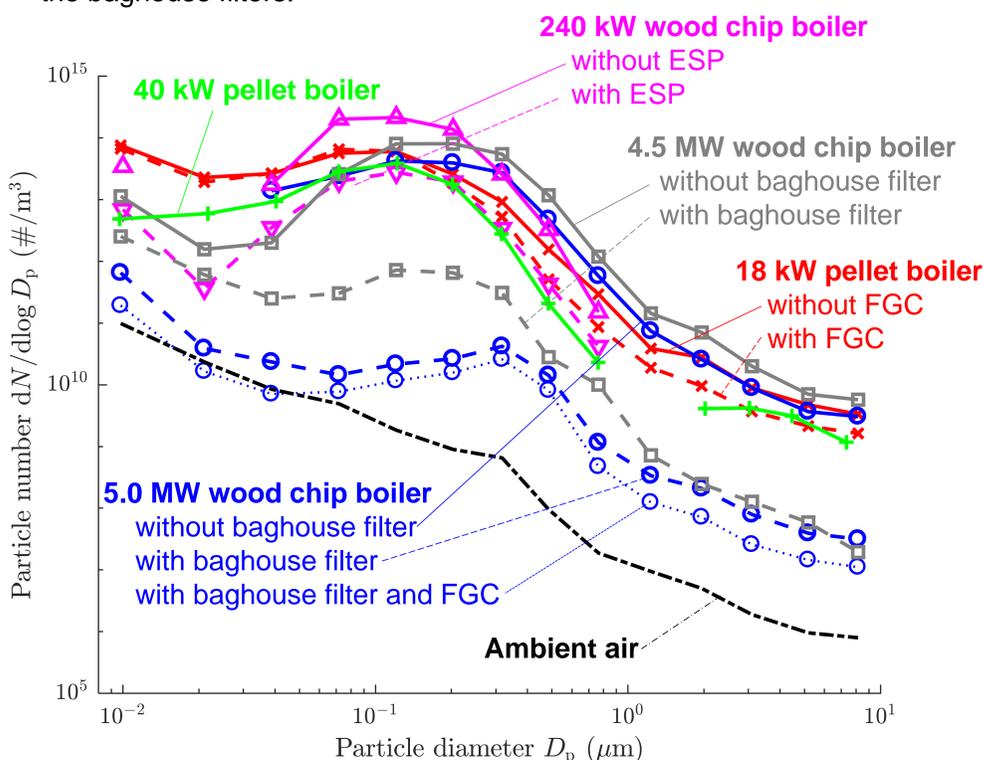

This negative η_{FGC} is due to particle growth mechanisms such as condensation growth and an increased agglomeration rate due to the liquid bridge formed between the particles [3]. This is the subject of our ongoing research. Regardless of the negative η_{FGC} , the overall PM reduction is positive. In addition, the additional thermal output of the condenser ensures even less PM per energy produced.

References

- [1] Oberdörster *et al.* (1994) Environmental Health Perspectives, 102: 173-179. DOI: [10.2307/3432080](https://doi.org/10.2307/3432080)
- [2] Cornette *et al.* (2020) Aerosol and Air Quality Research, 20: 499-519. DOI: [10.4209/aagr.2019.10.0487](https://doi.org/10.4209/aagr.2019.10.0487)
- [3] Li *et al.* (2020) Journal of Cleaner Production, 261: 121270. DOI: [10.1016/j.jclepro.2020.121270](https://doi.org/10.1016/j.jclepro.2020.121270)